
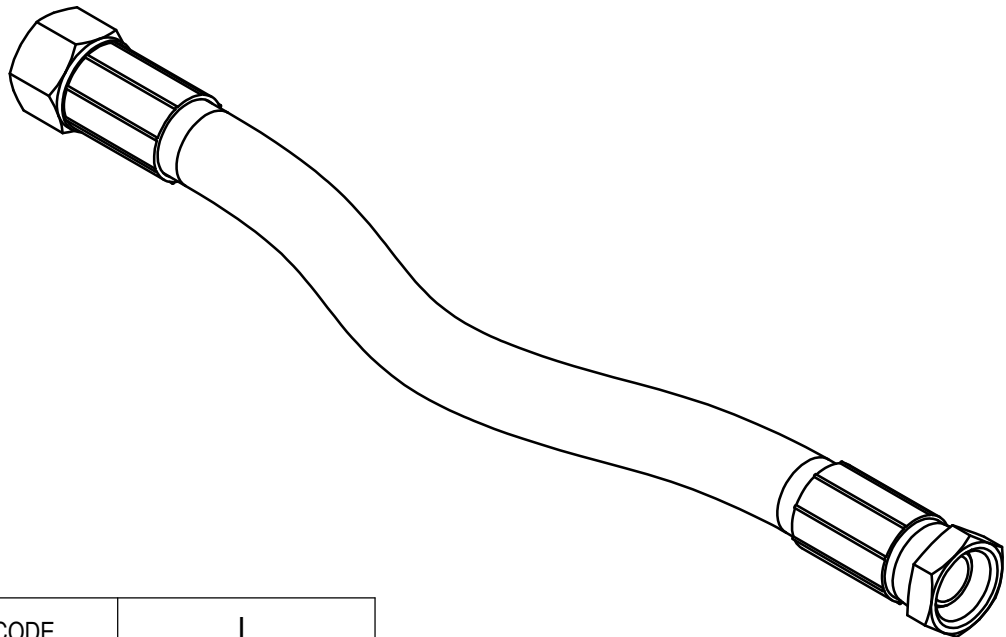


DIBUJADO DRAW	A. ESTERUELAS	31/3/17	CODIGO / CODE: NG-DIS-1-MOD-xxx	REVISION / REVIEW	00	FECHA / DATE	03/17
REVISADO CHECKS	J.R.GONZALEZ	03/17					
APROBADO OK	J.R.GONZALEZ	03/17					

DESCRIPCIÓN:	Latiguillos utilizados para conducir la descarga del agente extintor de un cilindro en sistemas modulares.
DESCRIPTION:	Hoses used to conduct the discharge of extinguishing agent in modular system cylinders.

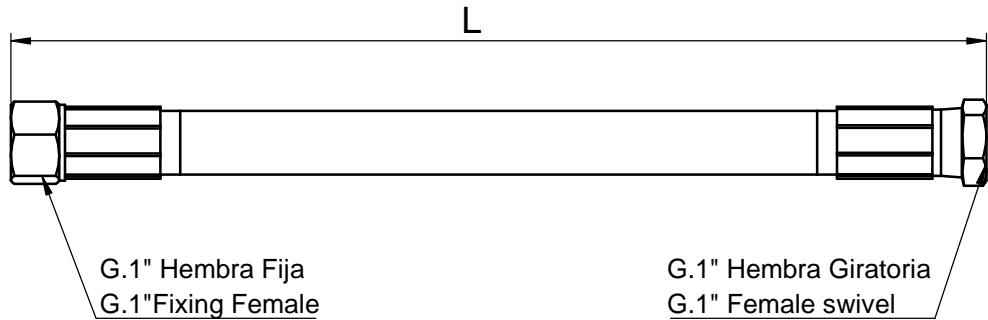

CODIGO // CODE	L
NG-DIS-1-MOD-500	500 mm // 19.7 in
NG-DIS-1-MOD-1000	1000 mm // 39.4 in

ROSCA / THREADED : G. ISO 228

CARACTERÍSTICAS TÉCNICAS // TECHNICAL CHARACTERISTICS				
Ø TUBO // Ø TUBE	PRESIÓN MAX. TRABAJO // MAX. WORKING PRESSURE	PRESIÓN DE ROTURA // BURST PRESSURE	RADIO CURVATURA // BENDING RADIUS	TEMPERATURA DE TRABAJO // WORKING TEMPERATURE
1"	53bar // 769psi	352bar // 5104psi	230mm // 9.1in	-40°C ~ 100°C // -40°F ~ 212°F
MATERIAL // MATERIAL				
MANGUERA EN 857 1SC // EN 857 1SC HOSE		CAUCHO SINTETICO REFORZADO CON MALLA METALICA // SYNTHETIC RUBBER WITH METAL MESH REINFORCED		
RACORS // COUPLINGS		ACERO ZINCADO // ZINCATED PLATE STEEL		